
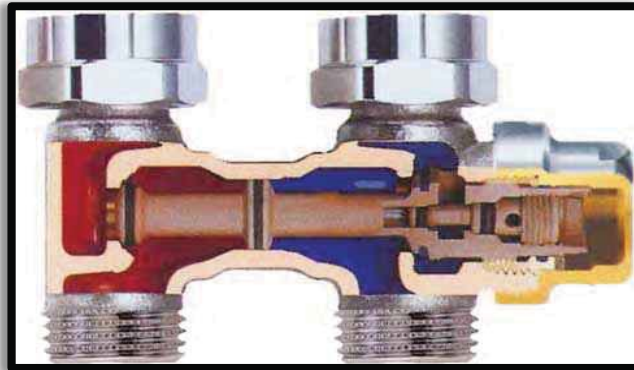


radiator accessories

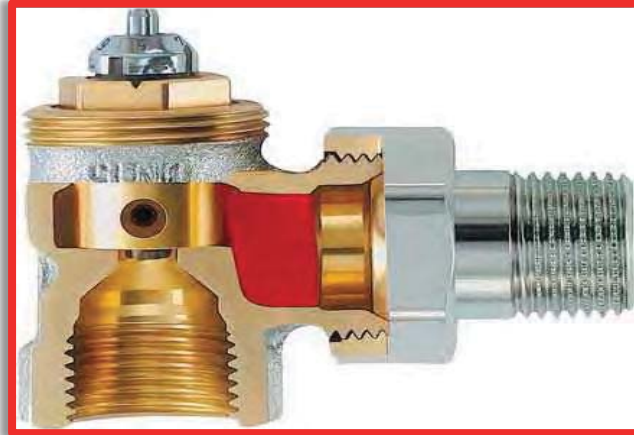

Thermostats 2

Thermostat Adapters

Air Vent

Single Entry Valve

Fittings

Angle Valve Body 3

Valve Body

Union Shut Off

Copper Tail Pieces 4

Nipples

Trim Plates

Electric Element 5

Compression Fitting

Valve Insert

Diverting Valve









Tail Pieces








Temperature Controller 6








Radiator Accessories

Towel Hangers... 7




	Part #	Description	List Price Each
Thermostats			
	1011	<p>Thermostat M30 × 1.5</p> <p>Designed to be mounted on all thermostatic bodies and radiators with integrated valves which have an M 30 x 1.5 thermostatic insert.</p> <p>The best temperature sensor motor available, locking temperature position feature</p> <p>Setting numbers 1 to 5 (43 °F to 82 °F [6 °C to 28 °C]).</p> <p>Frost protection.</p> <p>Maximum sensor temperature environment 122 °F [50 °C]</p>	43.15
	1013	HerzCules Tamperproof thermostat with locking feature M30 x 1.5	76.90
	1013M	HerzCules Tamperproof thermostat with locking feature (for Macon Valves) M28 x 1.5	76.90
	9063	Hercules Un-locking Tool	2.50
	1014	<p>Thermostat M30 × 1.0</p> <p>Designed to be mounted on all thermostatic bodies which have an M 30 x 1.0 thermostatic insert.</p> <p>Setting numbers 1 to 5 (43 °F to 82 °F [6 °C to 28 °C]).</p> <p>Frost protection.</p> <p>Maximum sensor temperature environment 122 °F [50 °C]</p>	41.00
	1016	<p>Thermostat M30 × 1.5 polished chrome</p> <p>Designed to be mounted on all thermostatic bodies and radiators with integrated valves which have an M 30 x 1.5 thermostatic insert.</p> <p>Setting numbers 1 to 5 (43 °F to 82 °F [6 °C to 28 °C]).</p> <p>The best temperature sensor motor available, locking temperature position feature</p> <p>Frost protection.</p> <p>Maximum sensor temperature environment 122 °F [50 °C]</p>	62.85
	1165	<p>Low profile thermostat M30 × 1.5</p> <p>Designed to be mounted on all thermostatic bodies and radiators with integrated valves which have an M 30 x 1.5 thermostatic insert.</p> <p>Economically priced with reliable operation, locking temperature position feature</p> <p>Setting numbers 1 to 6 (43 °F to 82 °F [6 °C to 28 °C]).</p> <p>Frost protection.</p> <p>Maximum sensor temperature environment 122 °F [50 °C]</p>	28.15
	1165-M28	<p>Low profile thermostat M28 × 1.5</p> <p>Designed to be mounted on all thermostatic bodies which have an M 30 x 1.0 thermostatic insert.</p> <p>Setting numbers 1 to 5 (43 °F to 82 °F [6 °C to 28 °C]).</p> <p>Frost protection.</p> <p>Maximum sensor temperature environment 122 °F [50 °C]</p>	28.15
	1180	Manual temperature adjuster head	12.70
	1225	<p>Remote Thermostat with 6 ½' capillary M30 × 1.5</p> <p>Designed to be remotely mounted for all thermostatic bodies and radiators with integrated valves which have an M 30 x 1.5 thermostatic insert.</p>	129.80
	1226	<p>Remote Thermostat with 16' capillary M30 × 1.5</p> <p>Designed to be remotely mounted for all thermostatic bodies and radiators with integrated valves which have an M 30 x 1.5 thermostatic insert.</p>	143.35
	3082	<p>Remote Thermostat with 30' capillary (WM-32)</p> <p>Designed to be remotely mounted for all thermostatic bodies and radiators with integrated valves which have an M 30 x 1.5 thermostatic insert</p>	149.35
	3080	Non-electric temperature controller 86 °F to 140 °F	241.35
	3081	Non-electric temperature controller 104 °F to 158 °F	241.35
	1943	Remote bulb non-electric thermostat	92.50







	Part #	Description	List Price Each
	1045	Right angle adapter M30 × 1.5 90 degree angle adapter for thermostats M30x1.5 / M30x1.5 Surface: white	40.15
Radiator Valves			
	1185	Single entry valve side feed less fittings Single-Entry valve for side mount installation with immersion pipe for radiators with lateral single point connection.	66.15
	1185A	Single entry valve side feed "NO" bypass less Fittings	66.15
	1186	Single entry valve bottom feed Single-Entry valve for bottom feed radiators immersion pipe, for radiators with a lower single-point connection.	66.15
	1694	½" RH side angle radiator valve body	62.55
	1694E	½" RH side angle radiator valve less connection fittings - Euroconus	50.70
	1695	½" LH side angle radiator valve body	62.55
	1695E	½" LH side angle radiator valve body less connection fittings - Euroconus	50.70
	1880E	½" Reverse angle pattern valve Less fittings	37.75
	1881	¾" reverse angle pattern valve	65.10
	1889E	½" angle radiator valve body less connection fittings - Euroconus	32.75
	1889	½" angle radiator valve body	36.35
	1890	¾" angle radiator valve body only	60.25
	1891	1" angle radiator valve body only	85.10
	1892	1 ¼" angle radiator valve body only	115.30

	Part #	Description	List Price Each
	1991E	½" Straight radiator valve less connection fittings - Euroconus	26.70
	1991	½" Straight radiator valve body only	36.35
	1992	¾" Straight radiator valve body only	46.55
	1994	1" Straight radiator valve body only	65.90
	1995	1 ¼" Straight radiator valve body only	120.75
	1059	Angle 2-pipe Rad Valve (less fittings - Vertical Radiators) with <u>bypass</u>	70.00
	1059A	Angle 2-pipe Rad Valve (less fittings - Vertical Radiators)	60.00
	1060	Straight 2-pipe Rad Valve (less fittings - Vertical Radiators) with bypass	70.00
	1060A	Straight 2-pipe Rad Valve (less fittings - Vertical Radiators)	60.00
	1168	½" polished chrome straight radiator valve Straight, polished chrome for M30 X 1.5 thermostatic inserts maximum delivery water temperature: 248°F [120°C]	143.10
	1169	½" polished chrome side angle valve Angle polished chrome for M30 X 1.5 thermostatic inserts maximum delivery water temperature: 248°F [120°C]	143.10
	1264	½" Straight Radiator Valve Manual Adjustment Only	26.60
	1265	½" Angle Radiator Valve Manual Adjustment Only	26.60
	1170	½" polished chrome straight union shutoff Straight polished chrome lockshield valve maximum delivery water temperature: 248°F [120°C]	143.10
	1171	½" polished chrome angle union shutoff Angle polished chrome lockshield valve maximum delivery water temperature: 248°F [120°C]	143.10
	1291E	½" Angle union shutoff less connection fittings - Euroconus	22.50
	1291	½" Angle union shut-off	24.40
	1292	¾" Angle union shut-off	34.75

	Part #	Description	List Price Each
	1293	½" Straight union shut-off	24.50
	1293E	½" Straight union shut-off less connection fittings - Euroconus	22.50
	1294	½" straight Combi "2" cop × cop union shut-off	31.30
	1295	¾" Straight union shut-off	34.25
	1057	Angle "H" fitting with bypass less connection pieces	51.70
	1057A	Angle "H" fitting "NO" bypass less connection pieces	38.10
	1058	Straight "H" fitting with bypass less connection pieces	51.70
	1058A	Straight "H" fitting "NO" bypass less connection pieces	38.10
	1340	Straight "H" fitting crossover ("Oops fitting")	39.75
	1301	Flat sealing "H" fitting Euroconus cone adapter	4.70
	1648	¾" Euroconus 90	19.15

	Part #	Description	List Price Each
	1270	Valve insert for radiator valves	12.00
	1271	Valve insert for radiator valves	12.00
	1272	Valve insert for radiator valves	12.00
	3733	Mini straight shut-off valve - chrome	92.80
	3734	Mini angle shut-off - chrome	92.80
	3791	H 3000-TS chrome angle valve M28 x 1.5	161.10
	3792	H 3000-TS chrome straight valve M28 x 1.5	161.10
	7633	Mini straight M28 radiator valve - chrome	92.80
	7646	Mini M28 RH angle radiator valve - chrome	92.80
	9200	Mini deluxe chrome thermostat M28 x 1.5	72.75
	6066	1/2" Chrome insert fitting for M28 valves	24.50
	6284	1/2" Copper compression - chrome for M28 valves	24.50
		1088	3/8" BSP automatic air vent
	5900	Air Vent, rotating 1/2"	6.50
	1913	1/2" BSP Chrome Plug for radiators	6.50
	1228	3/4" Euroconus Air Vent	7.30
	6020C	3/8" Chrome insert fitting for radiator valves Single Entry valves or any fitting that has 3/4" Euroconus.	10.00
	6021C	1/2" Chrome insert fitting for radiator valves Single Entry valves or any fitting that has 3/4" Euroconus.	10.00
	6022C	5/8" Chrome insert fitting for radiator valves Single Entry valves or any fitting that has 3/4" Euroconus.	10.00

	Part #	Description	List Price Each
	1027	Compression fitting for 1/2" copper	10.00
	1368	1/2" female union nuts (price per each)	21.50
	1967	1/2" copper tailpiece	5.15
	1968	3/4" copper tailpiece	7.95
	1028	Panel nipple to receive fittings	5.15
	1167	1/2" Polished chrome Tee for electric element 1/2"M x 1/2"F x 1/2"F	36.50
	1167W	1/2" White Tee for electric element 1/2"M x 1/2"F x 1/2" F	36.50
	EE300	300 Watt electric element for towel heaters	121.55
	EE500	500 Watt electric element for towel heaters	125.70
	EE900	900 Watt electric element for towel heaters	148.60
	HRDB50	50 mm Escutcheon for 1/2" & 5/8" tube with 2-7" UV resistant cover tube	6.95
	1067	50mm white plastic trim plate (1/2" Pex/ 1/2" cop)	3.95
			
	6037	LOCTITE 55	13.65
	TBHAN-1100-2	Towel bar bracket stainless steel {2pk}	52.20
	TBRAD-0500-1	Towel bar set 500 mm stainless steel	97.00
	TBRAD-0700-1	Towel bar set 700 mm stainless steel	106.30
	TBRAD-0900-1	Towel bar set 900 mm stainless steel	115.60
	TBRAD-1100-1	Towel bar set 1100 mm stainless steel	128.40
	5920	Radiator cleaning brush	45.10

Part #	Description	List Price Each	
Mounting Hardware			
	3419 White Towel Warmer Mounting Bracket	40.50	
	3420 Chrome Towel Warmer Mounting Bracket	83.50	
	3421 Brass Chrome Towel Warmer Mounting Bracket	50.50	
	3422 Stainless Steel Towel Warmer Mounting Bracket	50.50	
	9025 Standing Floor Bracket for 21 series radiators	42.00	
	9025A Standing Floor Bracket for 22 series radiators	42.00	
	9026 Standing floor bracket plastic base cover not available for 33 series radiators	12.00	
Number of pedestals needed per radiator			
Radiator heights: 11 $\frac{3}{4}$ " - 19 $\frac{3}{4}$ "		Radiator heights: 23 $\frac{3}{4}$ " - 35 $\frac{3}{4}$ "	
Radiator length	Qty per radiator	Radiator width	Qty per radiator
16" - 70"	2	16" - 48"	2
75" - 118"	3	51" - 70"	3
		75" - 94"	4
		98" - 118"	5
Attention: Distance at lower edge : Maximum 5 $\frac{3}{4}$ "			
	378300 Reversible wall bracket for 300 series (pr)	24.45	
	378400 Reversible wall bracket for 400 series (pr)	25.35	
	378500 Reversible wall bracket for 500 series (pr)	28.15	
	378600 Reversible wall bracket for 600 series (pr)	29.05	
	378700 Reversible wall bracket for 700 series (pr)	30.55	
	378750 Reversible wall bracket 750mm	32.55	
	578300 L-bracket for 300 series	9.05	
	578400 L-bracket for 400 series	10.75	
	578500 L-bracket for 500 series	12.05	
	578600 L-bracket for 600 series	13.35	
	578700 L-bracket for 700 series	15.90	

