


# CRETE-HEAT™

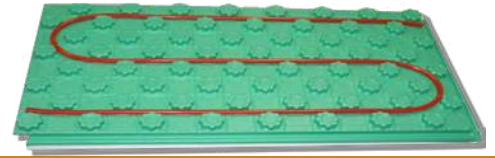

Job Name .....

Job Location ..... Part # .....

Contractor ..... Date .....



Engineer Approval ..... Date .....

Product Specifications			
3" Grid Pattern for 3/8", 1/2" and 5/8" tubing or 3/4" and 1" tubing			
Board Size	25" x 49"	25" x 49"	25" x 49"
Effective Area	24" x 48"	24" x 48"	24" x 48"
Nominal Thickness of Insulation	3"	2"	1" or 1 1/2"
Total Thickness	3 7/8"	2 7/8"	1 7/8" or 2 1/4"
Standard Color	Green	Green	Green
Thermal Resistance Ft <sup>2</sup> · F·h/Btu (ASTM C518-04)	R-15	R-10	R-6
Compressive Resistance@10% deformation (ASTM C165-00)	25 psi / 3600 psf	25 psi / 3600 psf	25 psi / 3600 psf
Perm Resistance (ASTM E96-00)	.46 perms	.51 perms	.68 perms

### Material Specifications

Part	Material
1 Vapor Barrier	High Impact Polystyrene
2 Board Insulation	Expanded Polystyrene

### Determining the Layout

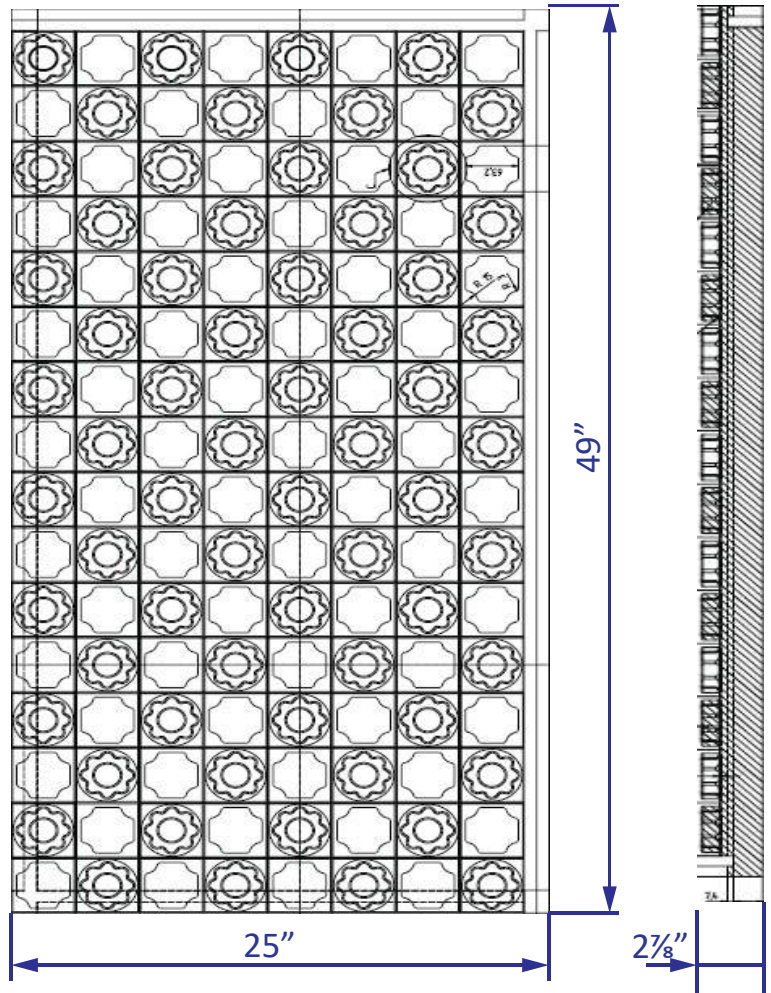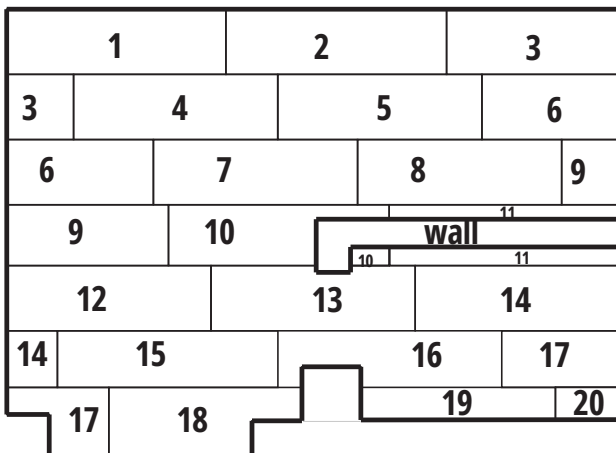

### Panel Illustrated CH2

Tongue & Groove for interlocking panels

